

Stainless Steel Threaded Swing Check Valve 14 bar (200 psi), 3/8" ~ 3"

Series SSC

Features

- Suitable for a wide range of industry and media
- Precision, high quality investment castings
- Screwed-in cover; integral stainless steel seat
- EN10204-3.1 Material certificate available

Standards

- Female threaded to NPT, DIN259/2999, and BS standards
- Inspection & test acc. to API 598, EN 12266-1

Limitation

- If installed in a vertical position, the direction of flow must be in an up-flow direction.
- If installed in a horizontal position, the valve must be installed with the cover oriented to the top.

PMA: 200 psi@50°C

TMA: 180°C


Selection:

Material of Body:
CF8M (1.4408)



Materials List		
No.	PARTS NAME	MATERIALS
1	BODY	ASTM A351 CF8M
2	CAP	ASTM A351 CF8M
3	HANGER PIN	SS316
4	DISC	ASTM A351 CF8M
5	GASKET PACKING	TEFLON
6	PLUG	SS316
7	PLUG PACKING	TEFLON

* Enclosed is a condensed table. For complete options, contact PVS FLOW CONTROL directly.

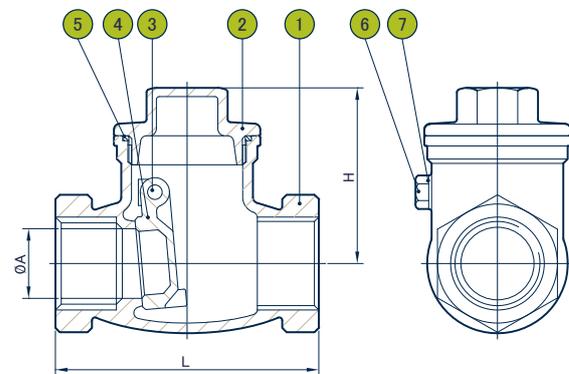

Dimensions (mm)

Size		A	H	L
IN	DN			
3/8"	10	13	45	65
1/2"	15	15	45	65
3/4"	20	20	56	80
1"	25	25	62	90
1¼"	32	32	67	105
1½"	40	40	73	120
2"	50	50	82	140
2½"	65	65	93	180
3"	80	80	104	200