

WAFER TYPE SPRING LOAD CHECK VALVE

Model : Series SWS

DIN PN 40





- **Body Material**
DIN 1.4408
- **Size Range**
DN15~DN200
- **Pressure Rating**
DIN PN40, 150 PSI Saturated Steam
- **Standards**
API598
- **Face to Face**
DIN3202 K4
- **Temperature Range**
-4°F to 500°F (-20°C to 260°C)

Materials List:

NO.	PART NAME	MATERIAL
1	BODY	EN10213-4 1.4408
2	DISC	SS316
3	SPRING	SS316
4	CAP	SS316
5	SCREW	SS316
6	INSERT	EN10213-4 1.4408

DIN PN40 Dimensions (mm):

SIZE		d	L	B	C	E	F
IN	DN						
1/2"	15	15	16	45	53	34	40
3/4"	20	20	19	55	63	43	50
1"	25	25	22	65	73	52	60
1-1/4"	32	32	28	78	84	63.5	73
1-1/2"	40	38	32	88	94	73	83
2"	50	50	40	98	107	82	93
2-1/2"	65	65	46	118	126	93	114
3"	80	80	50	134	144	116	130
4"	100	97	60	154	164	134	150
5"	125	110	90	-	-	155	190
6"	150	130	105	-	-	178	218
8"	200	170	140	-	-	230	272

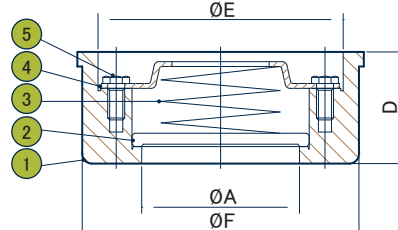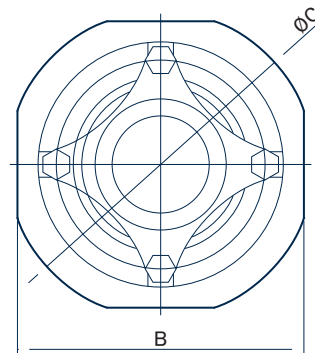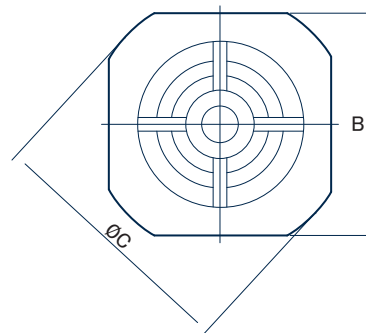

WAFER TYPE SPRING LOAD CHECK VALVE

Model : Series SWS

DIN PN 40

- **Body Material**
DIN 1.4408
- **Size Range**
DN15~DN200
- **Pressure Rating**
DIN PN40, 150 PSI Saturated Steam
- **Standards**
API598
- **Face to Face**
DIN3202 K4
- **Temperature Range**
-4°F to 500°F (-20°C to 260°C)



Materials List:

NO.	PART NAME	MATERIAL
1	BODY	EN10213-4 1.4408
2	DISC	SS316
3	SPRING	SS316
4	CAP	SS316

DIN PN40 Dimensions (mm):

SIZE		d	L	E	F
IN	DN				
5"	125	110	90	155	190
6"	150	130	105	178	218
8"	200	170	140	230	272

