

WAFER TYPE SPRING LOAD CHECK VALVE

Model : Series SWS

ANSI CLASS 150



- **Body Material**
DIN 1.4408
- **Size Range**
DN15~DN200
- **Pressure Rating**
DIN PN40, 150 PSI Saturated Steam
- **Standards**
API598
- **Face to Face**
DIN3202 K4
- **Temperature Range**
-4°F to 500°F (-20°C to 260°C)

Materials List:



NO.	PART NAME	MATERIAL
1	BODY	EN10213-4 1.4408
2	DISC	SS316
3	SPRING	SS316
4	CAP	SS316
5	SCREW	SS316
6	INSERT	EN10213-4 1.4408

ANSI CLASS 150 Dimensions (mm):

SIZE		A	B	C	D	E	F
IN	DN						
1/2"	15	15	-	-	18	26	37
3/4"	20	20	-	-	22	34	45
1"	25	25	-	-	28	42	55
1-1/4"	32	32	-	-	32	52	66
1-1/2"	40	38	-	-	37	62	77
2"	50	50	-	-	47	78	94
2-1/2"	65	65	118	126	47	93	114
3"	80	80	134	144	50	116	130
4"	100	97	154	164	60	134	150
5"	125	110	-	-	90	155	190
6"	150	130	-	-	105	178	218
8"	200	170	-	-	140	230	272

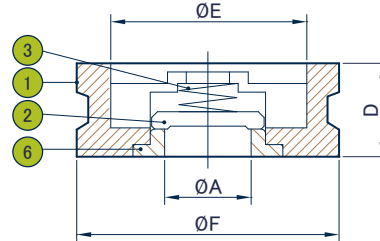

FOR SIZE 1/2" TO 2"

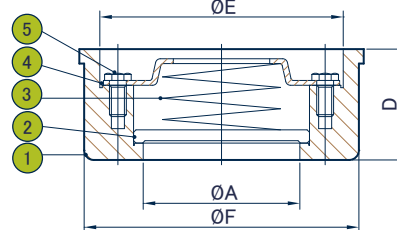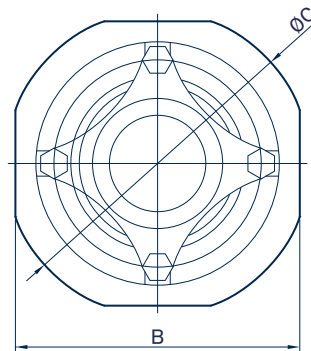



FOR SIZE 2-1/2" TO 4"

WAFER TYPE SPRING LOAD CHECK VALVE

Model : Series SWS

ANSI CLASS 150

- **Body Material**
DIN 1.4408
- **Size Range**
DN15~DN200
- **Pressure Rating**
DIN PN40, 150 PSI Saturated Steam
- **Standards**
API598
- **Face to Face**
DIN3202 K4
- **Temperature Range**
-4°F to 500°F (-20°C to 260°C)

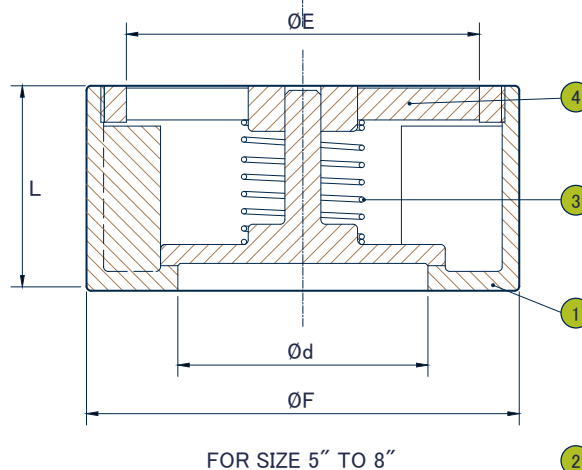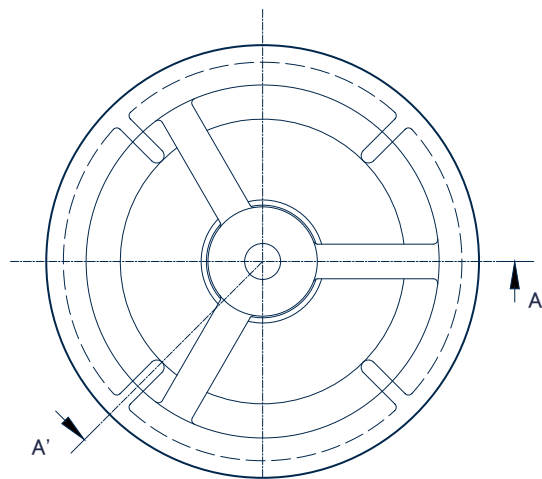

Materials List:

NO.	PART NAME	MATERIAL
1	BODY	EN10213-4 1.4408
2	DISC	SS316
3	SPRING	SS316
4	CAP	SS316

ANSI CLASS 150 Dimensions (mm):

SIZE		d	L	E	F
IN	DN				
5"	125	110	90	155	190
6"	150	130	105	178	218
8"	200	170	140	230	272